

SUBMITTAL INFORMATION

Flare Copper Coupling - (C28-xx-NL style)



FLARE COPPER TO MALE IRON PIPE THREAD

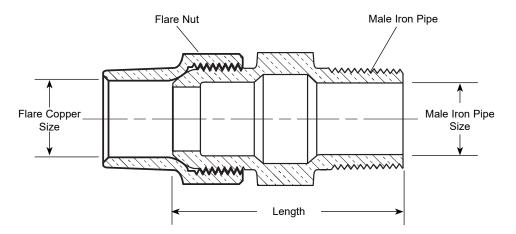

DESCRIPTION		•	APPROX.	Part	✓ SUBMITTED
FLARE COPPER	MALE IRON PIPE	Length	WT. LBS	NUMBER	Iтем(s)
1/2"	1/2"	2-1/8"	0.4	C28-11-NL	
1/2"	3/4"	2-1/16"	0.5	C28-13-NL	
5/8"	3/4"	2-1/8"	0.6	C28-23-NL	
3/4"	1/2"	2-3/16"	0.6	C28-31-NL	
3/4"	3/4"	2-1/4"	0.8	C28-33-NL	
3/4"	1"	2-9/16"	0.8	C28-34-NL	
1"	3/4"	2-3/8"	1.1	C28-43-NL	
1"	1"	3-5/8"	1.2	C28-44-NL	
1-1/4"	1"	2-7/16"	1.6	C28-54-NL	
1-1/4"	1-1/4"	2-15/16"	1.8	C28-55-NL	
1-1/2"	1-1/4"	3-13/16"	2.9	C28-65-NL	
1-1/2"	1-1/2"	3-13/16"	2.9	C28-66-NL	
2"	2"	4-1/8"	5.6	C28-77-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Body design provides hexagonal wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

