


SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve 14"-24" - (FTSS-xxxx-xx style)




TAPPING SLEEVE WITH STAINLESS STEEL OR CARBON STEEL FLANGE WITH 14" - 24" OUTLETS

Flange - 18-8 stainless steel with recess per MSS SP-60 to accept standard tapping valves. Flange conforms to AWWA C228 Class D ANSI 150# drilling. Optional carbon steel flange available.

Outlet Pipe - 18-8 Type 304 stainless steel Schedule 5

3/4-14 No-Lead Brass Test Plug

Bolts, Nuts, & Washers - ASTM A240 stainless steel. Heavy hex nuts are coated to prevent galling and maximize bolt efficiency

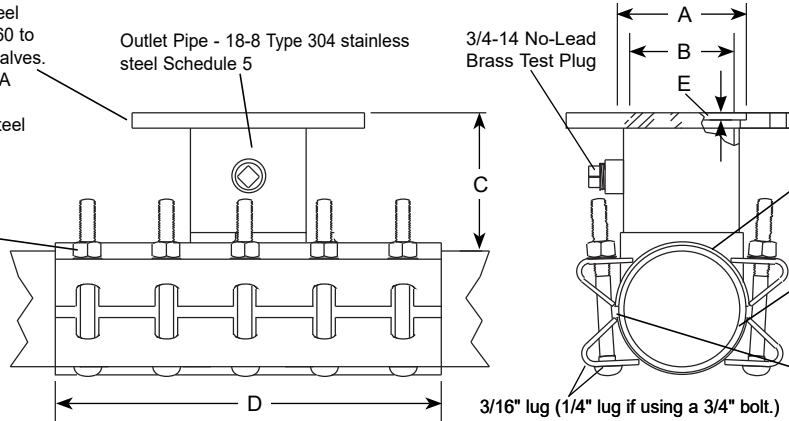

Outlet Gasket - Gridded NBR (Buna-N) compounded for water service, per ASTM D2000. Outlet gasket ensures complete seal of outlet area.

Full Gasket - Gridded virgin SBR compounded for water service, per ASTM D2000. Full gasket gives 360° pipe coverage.

Armors - Heavy Gauge ASTM A240 stainless steel are vulcanized to gasket and recessed to bridge the gap between lugs.

NOM. PIPE SIZE	SLEEVE O.D. RANGE	CATALOG NUMBER	BY	FLANGED OUTLET SIZE*	APPROX. WT. LBS.	NOMINAL DIMENSIONS - INCHES				No. BOLTS	✓ SUBMITTED ITEM(S)
						A	B	C	D		
14"	15.22-15.70	FTSS-1570-xx	X	14	275	15-9/32	13-1/2	6 1/4	24	12	
	15.80-16.20	FTSS-1620-xx									
	16.48-16.88	FTSS-1688-xx									
16"	17.20-17.60	FTSS-1760-xx	X	14	245	15-9/32	13-1/2	6 1/4	24	12	
	17.32-17.80	FTSS-1780-xx									
	17.75-18.15	FTSS-1815-xx									
	18.15-18.62	FTSS-1862-xx		16	325	17-9/32	15-1/2	6 1/4	32	20	
	18.80-19.20	FTSS-1920-xx									
18"	19.42-19.92	FTSS-1992-xx	X	14	250	15-9/32	13-1/2	6 1/4	24	12	
	19.80-20.20	FTSS-2020-xx		16	320	17-9/32	15-1/2	6 1/4	32	20	
				18	425	19-1/2	17-1/2	6 1/4	36	22	
20"	20.20-20.60	FTSS-2060-xx	X	14	265	15-9/32	13-1/2	6 1/4	24	12	
	21.20-21.60	FTSS-2160-xx		16	335	17-9/32	15-1/2	6 1/4	32	20	
	21.40-21.80	FTSS-2180-xx									
	21.86-22.26	FTSS-2226-xx		18	440	19-1/2	17-1/2	6 1/4	36	22	
	22.30-22.70	FTSS-2270-xx									
	23.40-23.80	FTSS-2380-xx									
24"	23.80-24.20	FTSS-2420-xx	X	14	290	15-9/32	13-1/2	6 1/4	24	12	
	25.60-26.00	FTSS-2600-xx		16	435	17-9/32	15-1/2	6 1/4	32	20	
	26.20-26.60	FTSS-2660-xx		18	465	19-1/2	17-1/2	6 1/4	36	22	
				20	595	20-1/2	19-1/2	6 1/4	40	24	
	24	720		25-1/2	23-1/2	6 1/4	48	32			

* The complete FTSS catalog number for a 16" pipe (17.32 O.D.) with a 16" stainless steel flange is FTSS-1780-16. For carbon steel flange, add "A" to the catalog number. Example: FTSS-1780-16A.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

Note: Highlighted ranges are recommended for ductile iron pipe, pit cast and C900/C905 pipe applications.

FEATURES

- Body, straps and UNC threaded bolts are made of 18-8 type 304 stainless steel. Flange can be either type 304 or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance
- UL classified to ANSI/NSF Standard 61
- Complies with AWWA C223 and MSS SP-124

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

02/22/19

Submitted By:



36 Hudson Rd
 Sudbury MA 01776



800-225-4616
 www.tisales.com