



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1300-S-xx-U style)



SERIES 1300-S 14" - 48" RESTRAINT FOR IPS PVC OR HDPE PIPE AND MECHANICAL JOINT FITTINGS

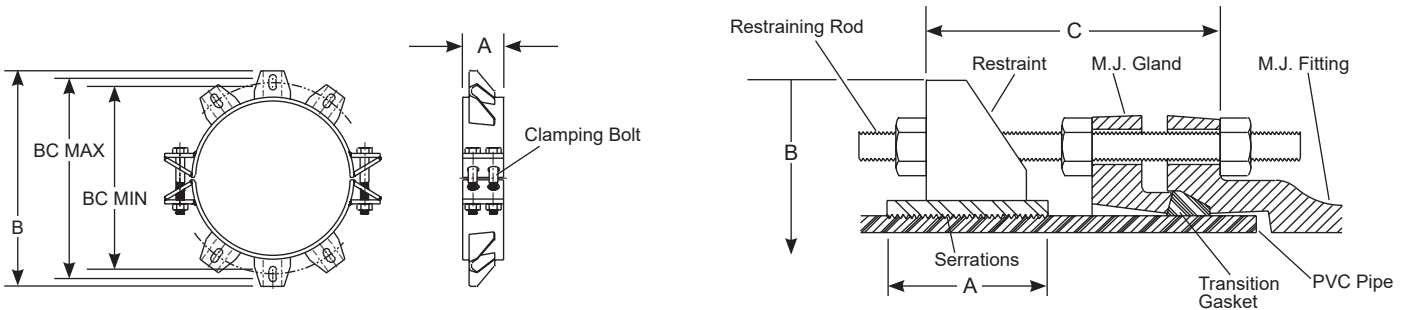

| NOM. PIPE SIZE | OD (IN.) | CATALOG No. | A | B APPROX. | C MAX | RESTRAINING BOLTS / RODS | | CLAMPING BOLTS | | BC MIN | BC MAX | APPROX. WEIGHT LBS | ✓ SUBMITTED ITEMS |
|----------------|----------|----------------|-----|-----------|-------|--------------------------|--------------|----------------|-------------|--------|--------|--------------------|-------------------|
| | | | | | | No. | SIZE | No. | SIZE | | | | |
| 14" | 14.00 | UFR1300-S-14-U | 4" | 21-7/16" | 15" | 6 | 3/4" x 17" | 4 | 7/8" x 7" | 17.13" | 19.13" | 72.5 | |
| 16" | 16.00 | UFR1300-S-16-U | 4" | 23-5/16" | 15" | 6 | 3/4" x 17" | 4 | 7/8" x 7" | 19.09" | 21.09" | 77.0 | |
| 18" | 18.00 | UFR1300-S-18-U | 5" | 25-9/16" | 15" | 8 | 3/4" x 17" | 4 | 1" x 7" | 21.09" | 23.09" | 109.0 | |
| 20" | 20.00 | UFR1300-S-20-U | 5" | 27-9/16" | 22" | 8 | 3/4" x 24" | 4 | 1" x 7" | 23.13" | 25.13" | 144.0 | |
| 24" | 24.00 | UFR1300-S-24-U | 5" | 31-9/16" | 22" | 12 | 3/4" x 24" | 4 | 1" x 7" | 27.13" | 29.13" | 220.0 | |
| 30" | 30.00 | UFR1300-S-30-U | 10" | 38-3/4" | 22" | 12 | 1" x 24" | 6 | 1-1/8" x 9" | 34.13" | 36.13" | 300.0 | |
| 36" | 36.00 | UFR1300-S-36-U | 10" | 45-7/8" | 22" | 12 | 1" x 24" | 6 | 1-1/8" x 9" | 40.25" | 43.25" | 340.0 | |
| 42" | 42.00 | UFR1300-S-42-U | 10" | 54-11/16" | 24" | 18 | 1-1/4" x 30" | 8 | 1-1/8" x 9" | 47.77" | 50.77" | 375.0 | |
| 48" | 48.00 | UFR1300-S-48-U | 10" | 60-7/8" | 24" | 22 | 1-1/4" x 30" | 8 | 1-1/8" x 9" | 53.83" | 56.83" | 400.0 | |

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- Fabricated out of carbon steel per ASTM A36
- 360° contact and support of the pipe wall
- Ideal companion for push-on fittings with restraint ears
- Rods (included) are high strength, low alloy steel ANSI / AWWA C111 / A21.11
- Clamping bolts and nuts - Grade 5, zinc plated
- Rated at full-rated pressure of any class of PVC pipe or HDPE (SDR9 through SDR26) with the use of a proper insert stiffener; minimum 2:1 safety factor
- Coating - Black alkyd enamel shop coat (NSF61 approved) with gray topcoat for identification purposes

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com



36 Hudson Rd
 Sudbury MA 01776



800-225-4616
 www.tisales.com

11/11/21